
Cathode
Uni-directional

Reflow Condition		Lead–free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150℃
	- Temperature Max ($T_{s(max)}$)	200℃

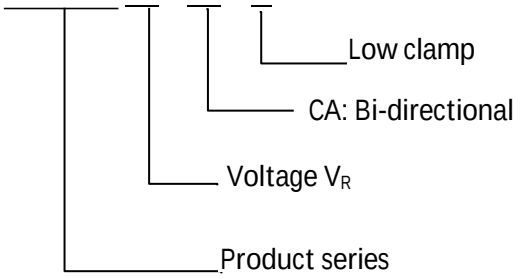
Low clamp
CA: Bi-directional
Voltage V_R
Product series


XXXXXX

